


HVA 60

4 in 1 Universal High Voltage Test System

- ◀ **VLF**
- ◀ **DC**
- ◀ **Jacket/Sheath**
- ◀ **Fault Conditioning**

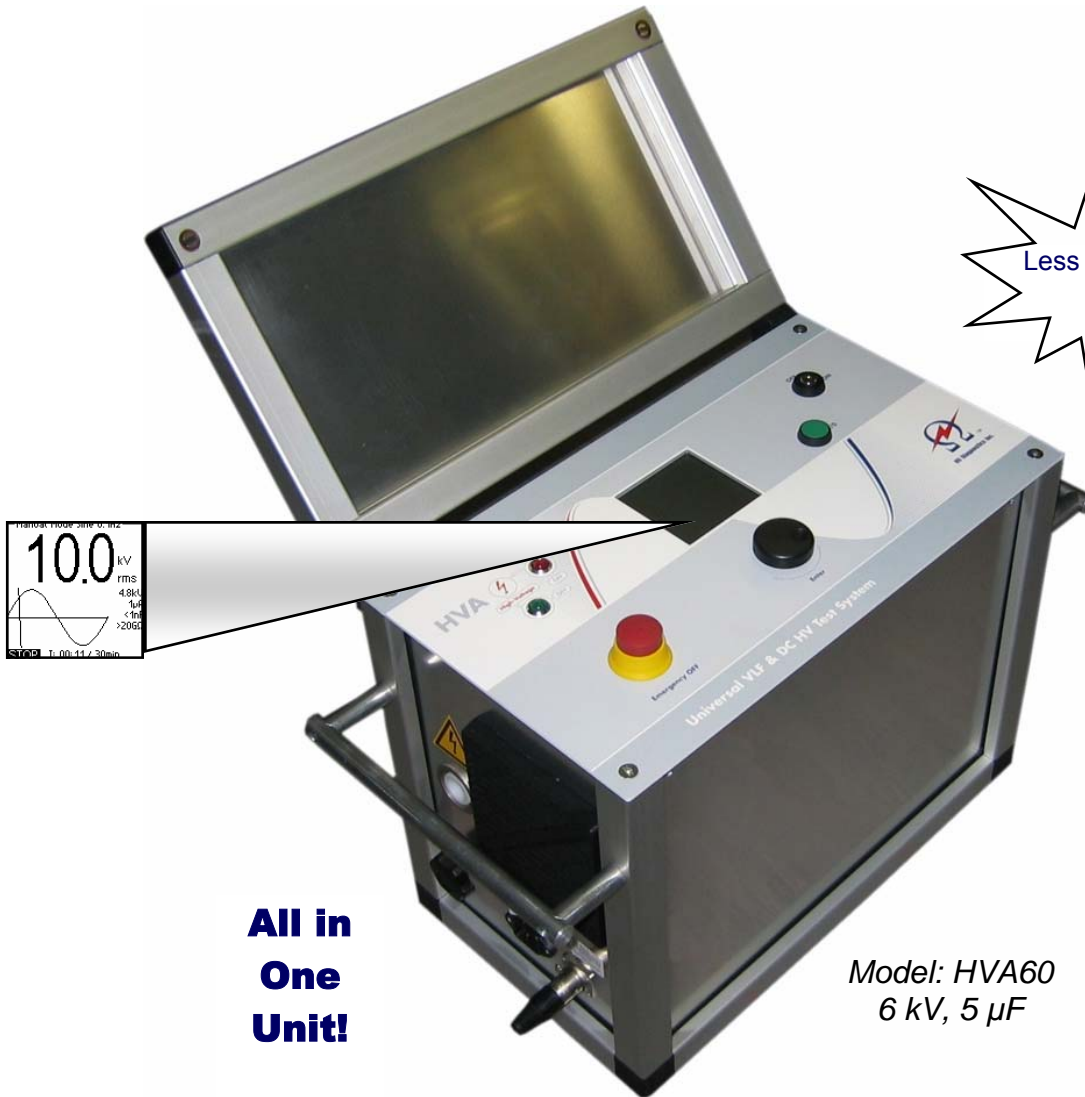

**All in
One
Unit!**

*Model: HVA60
6 kV, 5 μ F*




High Voltage Diagnostics S.á.r.l
4, Rue du Lac, Le Bouvert,
CH-1897, Switzerland.

Tel: +41 24 481 4733
Mobile: +27 82 551 2362
Email: sales@hvdsa.com

Fax: +41 24 481 4740
Mobile: +27 82 781 2632
Website: www.hvdsa.com

HVA 60

4 in 1 Universal High Voltage Test System

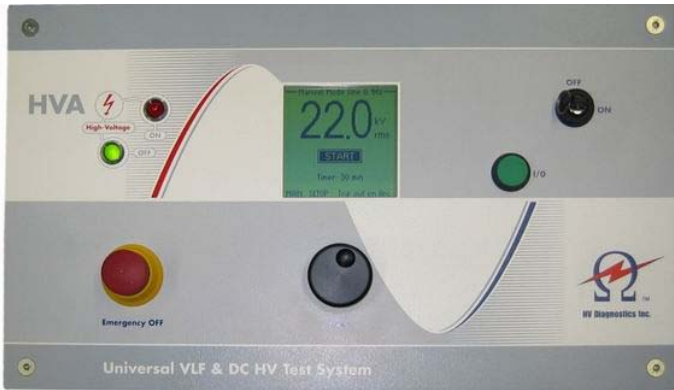

Faceplate of HVA60

Applications Include...

- √ Cables: XLPE, PE, EPR, PILC etc.
- √ Capacitors
- √ Switchgear
- √ Transformers
- √ Rotating Machines (IEEE 433)
- √ Insulators
- √ Bushings

Operational Features

- The smallest, lightest, most advanced universal high voltage test instrument available, ideally suited for a variety of applications.
- VLF (0.1Hz), DC (\pm), Cable Fault Conditioning (Burning), and Sheath/Jacket Testing modes all included.
- VLF: the proven and accepted replacement for the traditional DC Hipot or “proof” test for solid dielectric cables such as XLPE and EPR.
- Fully Automatic or manual cable test sequences complying with International Standards/Guides such as IEEE 400.2, VDE 0296, CENELEC, etc.
- Meets all your cable testing requirements.
- True Symmetrical Sinusoidal, load independent, output waveform across the full load range.
- Real-time Display of actual output waveform.
- Easy to use, ergonomic, menu guided, large backlit user interface.
- Rugged, one piece portability.
- Large output load capability (up to 5 μ F)
- Automatic and integrated load capacitance measurement with optimum frequency selection.
- Storage of test results for later retrieval or download to a PC/Laptop.
- No oil or arcing contacts that require routine maintenance.
- Short circuited protected with active arc management regulation that avoids the usual nuisance tripping of conventional HV test equipment when a dielectric failure occurs.

***Find Weak Cables without
Making Cables Weak!***



High Voltage Diagnostics S.á.r.l
4, Rue du Lac, Le Bouvert,
CH-1897, Switzerland.

Tel: +41 24 481 4733
Fax: +41 24 481 4740
Email: sales@hvdsa.com

Safety Features

- Short circuit protected
- Status display of all important safety functions and messages.
- Safe, easy to use operation with emergency off and key switch lock-out.
- Fully integrated discharge circuit to safely ground the DUT (Device Under Test) after testing.
- Zero start interlock.
- Zero voltage switching

Background

It is well known that DC testing of aged extruded cable such as XLPE and EPR is potentially damaging to the cable insulation causing premature failure of the cable under service conditions.

In addition, DC “proof” or hipot testing has been found to be ineffective in detecting even serious defects in cables. Since this is the main objective of any hipot test, and due to the negative side effects of DC, VLF AC waveform testing is now recommended by almost all cable testing standards/guides such as IEEE, CENELEC, VDE, SABS, etc.

Acceptance or maintenance hipot/proof testing using VLF high voltage sinusoidal AC allows the operator to efficiently detect serious cable insulation defects, before they result in an in-service failure, without affecting those healthy sections of the cable that still have remaining service life.

Design

The HVA60 is not only the most advanced HV test system available, it is also the lightest, most compact instrument of its type on the market. The HVA60 has the highest power to weight ratio of any comparable unit available.

There is no need to carry two pieces of equipment around and then interconnect them!

Apart from the variable frequency VLF output, the operator can also select dual polarity DC and cable jacket or sheath testing outputs modes.

The applied test voltage, current, capacitance, resistance and time are displayed and recorded.

The instrument is easily programmable allowing the operator to setup or select test sequences in either automatic or manual mode.

The HVA60 is capable of testing 1 μ F (Approx. 10,000 ft/ 3000m of cable) at 0.1Hz and 62kV peak. The frequency of the output can also be reduced allowing even larger capacitance loads to be tested. At 0.02Hz, approx. 50,000 ft/15,000m of cable can be tested.



To assist the operator, the instrument will automatically calculate the optimum frequency to be selected for larger loads.

The load independent, symmetrical output waveform avoids the potentially destructive space charge effects caused by DC polarization that occurs in aged extruded cables such as XLPE / PE / EPR, causing them to fail prematurely when exposed to conventional high voltage DC or to test instruments with large non-symmetrical output waveforms.

Should a breakdown occur during testing, the actual voltage at which it occurred is displayed and recorded. If cable burning (fault conditioning) mode is activated, the fault resistance can be conditioned to allow easier and less stressful fault location techniques to be applied.

Test results are stored in the instrument's onboard memory allowing easy retrieval and download to a PC/Laptop for review and analysis.



High Voltage Diagnostics S.á.r.l
4, Rue du Lac, Le Bouvert,
CH-1897, Switzerland.

Tel: +41 24 481 4733
Fax: +41 24 481 4740
Email: sales@hvdsa.com

Technical Data *(Part Number: 800 001)*

Input Voltage	100-240 V 50/60 Hz
Output Voltage	Sinusoidal: 0-62 kV peak, Symmetrical DC ±: 0-60 kV Accuracy ±1%
Output Current	0-50 mA (Resolution 10µA) Accuracy ±1%
Resistance Range	0.1 MΩ...5 GΩ
Output Frequency	0.02...0.1 Hz in steps of 0.01Hz (default 0.1Hz)
Output Load	1.0 µF @ 0.1 Hz @ 44kV RMS (Approx 10,000 ft of cable)* 2.0 µF @ 0.05 Hz @ 44kV RMS (Approx 20,000ft of cable)* 5.0 µF @ 0.02 Hz @ 44kV RMS (Approx 50,000ft of cable)* Maximum Capacitance 10µF
Output Modes	AC Hipot (VLF) Symmetrical and load independent across full range DC Hipot (plus or negative polarity) Burn / Fault Condition or Fault Trip Mode Jacket / Sheath Testing
Memory	Minimum 50 Test Records Stored in non-volatile built in memory
Metering	Voltage and Current (True RMS and/or peak) Capacitance, Resistance, Time, Flashover Voltage
Duty	Continuous
HV Cable	15' (4.5m) with Alligator clamps on end (other options available on request)
Weight	132 lbs / 60 kg
Computer Interface	RS232 connection (Software Included)
Dimensions (LXWXH)	18" x 13.5" x 20.5" / 450x340x520mm ** Excludes Carry Handle

Options

* Based on a typical cable: 100pF/ft (330pF/m)

Part Number	Description
800 004	Heavy Duty HV Test Lead with Quick Coupling MC Connector (15'/4.5m)
800 005	Shipping / Transport Case for HVA60 including compartment for Test Leads.
800 010	Vacuum Bottle Tester Feature Upgrade
700 006	Vise Grip Quick Connector
800 008	External Manual Discharge Rod / Grounding Rod
700 009	Flashing Remote HV Indication Light with clamp and 4.5m / 15ft extension lead.

European and Middle Eastern Office:

High Voltage Diagnostics S.á.r.L
4, Rue du Lac, Le Bouvert,
CH-1897, Switzerland.

Tel: +41 24 481 4733
Mobile: +27 82 551 2362
Email: sales@hvdsa.com

Fax: +41 24 481 4740
Mobile: +27 82 781 2632
www.hvdsa.com

North and South American Office:

HV Diagnostics Inc
271 Rope Mill Pkwy, Ste 2
Woodstock, GA, 30188, USA

Tel: +1 678 445 2555
Fax: +1 678 445 2557
Email: sales@hvdiagnostics.com



High Voltage Diagnostics S.á.r.l
4, Rue du Lac, Le Bouvert,
CH-1897, Switzerland.

Tel: +41 24 481 4733
Fax: +41 24 481 4740
Email: sales@hvdsa.com